



TEMPO PLUS 30



TEMPO PLUS 30

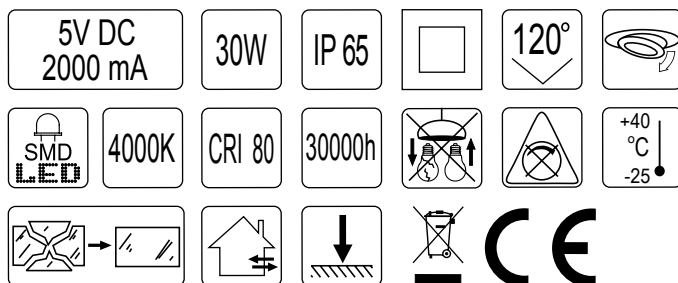

WYMIARY GABARYTOWE (mm)

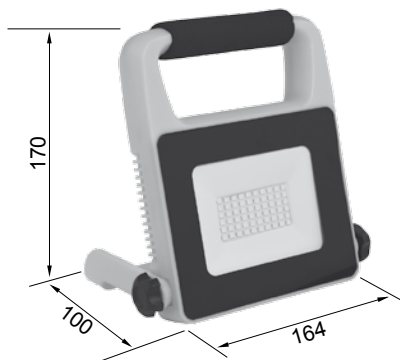

INSTRUKCJA MONTAŻU I EKSPLOATACJI TEMPO PLUS 30 – przenośne naświetlacze LED

CHARAKTERYSTYKA

TEMPO PLUS 30 to energooszczędne i uniwersalne przenośne naświetlacze LED. Dzięki wysokiej szczelności IP 65 doskonale nadają się do zastosowań zarówno wewnątrz, jak i na zewnątrz pomieszczeń. Zewnętrzna obudowa oprawy, wraz z uchwytem wykonane są z tworzywa ABS. Panel LED umieszczony jest w wewnętrznej aluminiowej obudowie. Zastosowana hartowana szyba zapewnia skuteczną ochronę diod LED przed uszkodzeniami mechanicznymi. Stojak oprawy wykonany jest z tworzywa ABS. Stojak wraz z uchwytem umożliwiają przenoszenie i umieszczanie oprawy w dowolnym miejscu. Regulacja kąta nachylenia naświetlacza pozwala na doświetlenie wybranej powierzchni.

Naświetlacz TEMPO PLUS 30 wyposażony jest w akumulator wewnętrzny, co pozwala na użytkowanie oprawy bez konieczności podłączania jej za każdym razem do sieci ~ 230V. Ładowanie oprawy może odbywać się za pomocą dołączonej ładowarki sieciowej oraz ładowarki samochodowej.

ŹRÓDŁO ŚWIATŁA

Jako źródło światła naświetlaczy TEMPO PLUS 30 zastosowano panel LED z diodami typu SMD, pozwalającymi na znaczną oszczędność energii w porównaniu do tradycyjnych opraw, przy zachowaniu takich samych parametrów świetlnych. Barwa światła: neutralna biała (4000K). Źródła światła są niewymienialne. W momencie zużycia się źródeł światła należy wymienić całą oprawę oświetleniową.

ZASTOSOWANIE

Ze względu na swoją uniwersalność, TEMPO PLUS 30 to doskonałe naświetlacze LED dla wszelkiego typu warsztatów, garaży, ekip remontowo-budowlanych, itp.. Świetnie sprawdzą się również jako oświetlenie namiotu lub jako awaryjne oświetlenie pomieszczeń w przypadku braku prądu, a także wszędzie tam, gdzie potrzebne jest przenośne źródło światła.

PARAMETRY TECHNICZNE

Model	TEMPO PLUS 30
Moc oprawy	30W
Zasilanie oprawy	5V DC, 2000mA
Kąt rozsyłu światła	120°
Stożek ochrony	IP 65
Klasa ochronności	II
Rodzaj źródła światła	diody LED typu SMD
Barwa światła	neutralna biała
Temperatura barwowa	4000K
Wskaźnik oddawania barw (CRI)	80
Trwałość diod LED*	30 000 godzin
Strumień świetlny oprawy	1500 lm ± 10%
Dopuszczalna temperatura otoczenia	-25°C ÷ +40C
Waga oprawy	0,65kg
Napięcie akumulatora	3,7V
Pojemność akumulatora	6600 mAh
Czas ładowania akumulatora	4 h
Czas świecenia na jednym pełnym naładowaniu	3 h

* parametr podawany w oparciu o dane producenta diod

W KOMPLECIE Z NAŚWIETLACZEM

W komplecie z naświetlaczem TEMPO PLUS 30 dostarczane są:

1. ładowarka sieciowa ~ 230V,
2. ładowarka samochodowa.



PARAMETRY ŁADOWARKI SIECIOWEJ I ŁADOWARKI SAMOCHODOWEJ

Zasilanie	Ładowarka sieciowa	Ładowarka samochodowa
Input	100-240V AC; 50/60Hz; 0,25A	12-24V DC
Output	5V DC, 2000mA	5V DC, 2000mA

UWAGA!

1. Przed podłączeniem i użytkowaniem oprawy prosimy o dokładne zapoznanie się niniejszą instrukcją.
2. Oprawę należy użytkować zgodnie z instrukcją oraz obowiązującymi przepisami.
3. Nie ponosimy odpowiedzialności za wady i uszkodzenia mogące wyniknąć z nieprawidłowego montażu czy eksploatacji urządzenia.
4. Nie należy zanurzać urządzenia w wodzie oraz w innych płynach.
5. Nie wpartywać się w wiązkę światła diod LED.
6. Niedopuszczalne jest użytkowanie wyrobu z pękniętą obudową oraz bez lub z pękniętą szybą ochronną.
7. Nie należy rozkręcać urządzenia oraz dokonywać samodzielnych napraw.
8. Nie używać urządzenia niezgodnie z jego przeznaczeniem.
9. Zastrzegamy sobie prawo do zmian w konstrukcji produktu.
10. Informacje zawarte w niniejszym dokumencie mogą ulegać zmianie bez uprzedzenia. Ewentualne zmiany będą uwzględniane w kolejnych wydaniach instrukcji obsługi lub w publikacjach i dokumentach uzupełniających.
11. Nie ponosimy odpowiedzialności za wady wynikłe z niestosowania się do zaleceń niniejszej instrukcji. Zgodnie z art. 568 § 1 Kodeksu Cywilnego uprawnienia z tytułu rękojmi za wady fizyczne wygasają po upływie dwóch lat, licząc od dnia wydania oprawy Kupującemu.

KONSERWACJA I BEZPIECZEŃSTWO

1. Dla zapewnienia optymalnych parametrów technicznych oprawy należy okresowo przeprowadzać jej konserwację.
2. Czyścić wyłącznie delikatnymi i suchymi tkaninami.
3. Nie używać chemicznych środków czyszczących.
4. Nie stosować strumienia wody pod ciśnieniem.
5. Nie zakrywać urządzenia.




Symbol oznacza selektywne zbieranie sprzętu elektrycznego i elektronicznego, czyli tego produktu nie wolno traktować jak innych odpadów domowych. Należy oddać go do właściwego punktu zbierającego zużyty sprzęt elektryczny i elektroniczny. Właściwa realizacja zadań związanych ze zbieraniem zużytego sprzętu elektrycznego i elektronicznego ma znaczenie szczególnie w przypadku, gdy w tym sprzęcie występują składniki niebezpieczne, które mają szczególnie negatywny wpływ na środowisko i zdrowie ludzi.


TEMPO PLUS 30



TEMPO PLUS 30

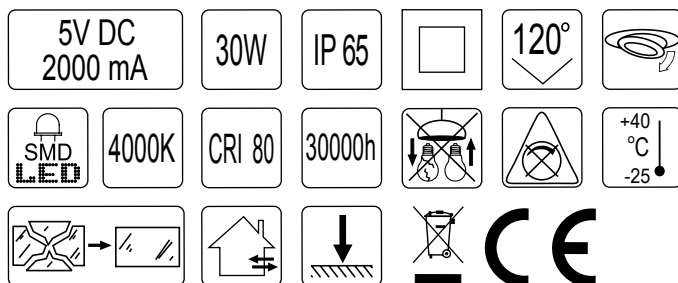

DIMENSIONS (mm)

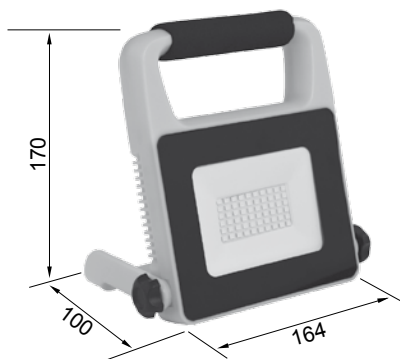

INSTALLATION AND OPERATING MANUAL

TEMPO PLUS 30 – LED portable floodlights

CHARACTERISTIC

TEMPO PLUS 30 are energy-saving and universal LED portable floodlights. They are perfect for applications both indoors and outdoors, due to the high IP 65 protection rating.

The outer housing of the luminaire and the handle are made of ABS plastic. The LED panel is placed in an internal aluminum housing. The tempered glass shield provides high protection rating as well as effective protection of LEDs against mechanical impact. The luminaire stand is made of ABS plastic. A stand with a handle allows to move and place luminaire in any place. Adjusting the inclination angle of the floodlight allows to illuminate the selected surface.

TEMPO PLUS 30 floodlight has inside battery thanks to which lamp works without connection to the mains ~ 230V. The luminaire can be charged using a mains charger and car charger. The chargers are included with the luminaire.

LIGHT SOURCE

LED panel with LEDs SMD type is used as the light source in TEMPO PLUS 30 floodlights, it allows significant energy saving comparing to traditional luminaires and keeps the same luminous parameters.

Light colour: neutral white (4000K).

The light sources of the luminaires are not replaceable, once the light source is used up full luminaire should be replaced.

APPLICATION

TEMPO PLUS 30 is cross functional LED floodlight, which is suitable for all kinds of workshops, garages, construction and repairing premises, etc. It can be also used for the lighting of tents as well as for houses, in the case of failure of current, or anywhere, where the portable lighting can be needed.

TECHNICAL DATA

Model	TEMPO PLUS 30
Power of the luminaire	30W
Supply luminaire	5V DC, 2000mA
Beam angle	120°
Protection rate	IP 65
Protection class	II
Type of light source	LEDs SMD type
Light colour	neutral white
Correlated colour temperature	4000K
Colour rendering index (CRI)	80
LEDs lifespan*	30 000 hours
Luminous flux of the luminaire	1500 lm ± 10%
Ambient temperature	-25°C ÷ +40°C
Weight luminaire	0,65kg
Battery voltage	3,7V
Battery capacity	6600 mAh
Battery charging time	4 h
Lighting time for one complete charging	3 h

* provided parameter is based on LEDs manufacturer's data

IN THE SET WITH THE FLOODLIGHT

The TEMPO PLUS 30 floodlight is supplied with:

1. ~ 230V mains charger,
2. car charger.



PARAMETERS of MAINS CHARGER AND CAR CHARGER

Charging	Mains charger	Car charger
Input	100-240V AC; 50/60Hz; 0,25A	12-24V DC
Output	5V DC, 2000mA	5V DC, 2000mA

CAUTION!

1. Before connecting and using the luminaire, please read this manual carefully.
2. The luminaire must be used according to the instruction and regulations in force.
3. We are not responsible for any defects or damage that may result from incorrect installation or using of the luminaire.
4. Do not immerse the luminaire in water or other liquids.
5. Do not look directly at LED light beam.
6. It's forbidden to use the product with damaged housing or with damaged tempered glass. It's forbidden to use the product with without the tempered glass.
7. Do not open the luminaire or make any repairs yourself.
8. Do not use the luminaire for purposes other than those for which it was intended.
9. We reserve the right to apply changes in the construction of the product.
10. The information included in this document may undergo changes without warning. Possible changes will be taken into consideration while working with other issues of the instructions for use or complementary documents.
11. We take no responsibility for faults resulting from non-compliance with the above instructions. According to article 568 pt 1 of the Polish Civil Code, the right resulting from a warranty for physical defects are extinct after the lapse of 2 (two) years after delivery of the luminaire to the Buyer.

SAFETY AND MAINTENANCE

1. To keep the optimal technical parameters of the luminaire the periodical maintenance should be carried out.
2. Clean only with delicate and dry cloths.
3. Do not use chemical cleaners.
4. Do not use stream of water under pressure.
5. Do not cover the luminaire.



This symbol stands for selective collecting of the electrical and electronic equipment, therefore, this product cannot be treated as other household's waste. It has to be left at a special used-equipment collection point. The appropriate dealing with the collection of used electrical and electronic equipment is crucial, especially if the equipment includes dangerous components which have a negative influence on the environment and on the health of people.